

Client Systems MPE Technical Certification Preparatory Course



Course Objectives

After you complete this course, you will have an understanding of the following:

- The course goals and objectives
- The HP 3000 operating system and hardware
- Many of the usual/normal tasks associated with system management.
- The recommended reference materials to assist you with your business in the future

Notes:


HP Reference Materials

- Manuals
- Online
- HP LaserROM

November, 1997

Notes:

System Directory

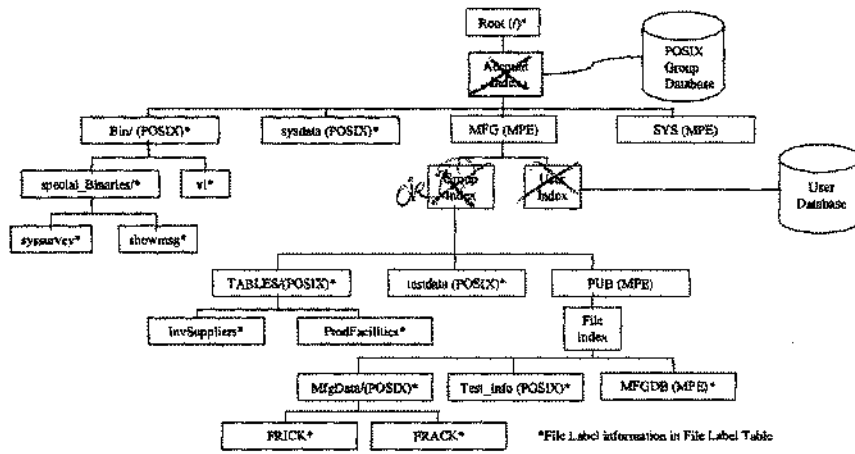

23

November, 1997

Notes:

MPE Files Listing Information

:LISTFILE *filesset#*; FORMAT =

- 3
- 2
- 1
- 0
- 1
- 2
- 3
- 4
- 5
- 6
- 7

:LISTFILE @ or :LISTFILE
:LISTFILE @.@MFG,3
:LISTFILE @.@@

Notes:


Changing Groups within Accounts

CHGROUP Allows user to change group within current account only

Notes:

Hierarchical File System

HFS

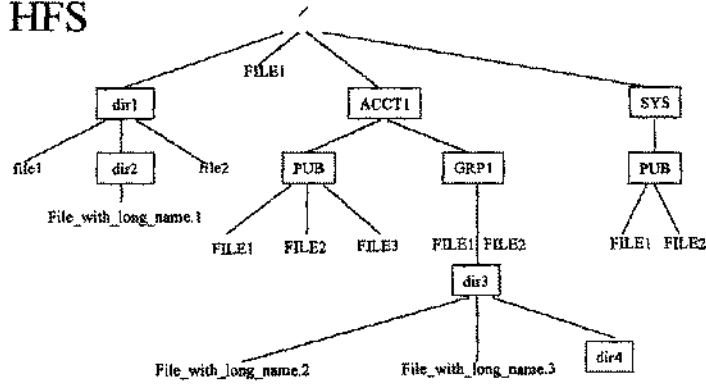

Notes:

NEWDIR

HELLO USER.ACCT,PUB

NEWDIR XYZ /ACCT/PUB/XYZ

or

NEWDIR /ACCT/PUB/XYZ /ACCT/PUB/XYZ

NEWDIR ./xyz /ACCT/PUB/xyz

NEWDIR ./xyz/LONG_DIR_NAME /ACCT/PUB/xyz/long_dir-name

* NEWDIR /XYZ

* Requires SM capability to create files or directories under root.

Notes:

Showing Disk Space Usage

DISKUSE (for HFS NAMESPACE)

Displays disk space usage, in sectors, for one or more directories or a directory tree.

SYNTAX

```
DISKUSE [ [DIR=]dir_name ]  
        [; TREE | NOTREE | USERNAME ]
```

REPORT (for MPE NAMESPACE)

Displays accounting information for the logon account and group. Any user may obtain REPORT information about the user's logon group. You must have account manager (AM) capability to issue the command for an entire account; or System Manager (SM) capability to issue the command for the entire system. (CM)

SYNTAX

```
REPORT [groupset] [listfile] [ONVS=[volumesetname]]
```

November, 1997

Notes:

LISTFILE in the HFS

EXAMPLE	DESCRIPTION
LISTFILE /@,2	Shows all files one level below CWD. (In HFS, accounts, groups, directories and files are all files.)
LISTFILE /@/@/@/@,2	Shows all four levels below root.
LISTFILE /ACCT2/,2	The slash following ACCT2 is called a TREE option and will show all files below the specified point. You could also enter LISTFILE /@,TREE.
LISTFILE /	In this example, the / calls the HFS name parser, then refers to all files on the system. This replaces LISTF @.@.@ or LISTFILE @.@.@.
LISTFILE /;NAME=D@	If you are looking for all files (recall that accounts, groups, and directories are also examples of files), but do not know the level of the target file, you can use the NAME option. This example will show all files at levels that begin with D or d.
LISTFILE /;NAME=[Ww] [H] [Ss] @	If you don't know the level of the case of a name you can use the NAME option with [] (brackets). The example provided will list any HFS file beginning with W or w, I or I as the second letter and S or s as the third letter, followed by anything.

Notes:

System Security and Control

As of MPE/iX 5.5, X access can also be used to allow a user to execute a command file, UDC or launch a jobstream without R access. This allows users to take advantage of these files without being able to see their content.

Notes:

Directory Access Modes

RD	Read directory entries
TD	Traverse directory entries
CD	Create directory entries
DD	Delete directory entries

These modes are implemented with ACDs.

Notes:

User Types

	For MPE	For HFS
ANY	System User	@.@
AC	Account member	\$GROUP
GU	Group user	
AL	Account librarian	
GL	Group librarian	
CR	File creator	\$OWNER

Notes:

Displaying Security Settings

```
:listfile myfile.pub.mktg,4
```

```
*****  
FILE:MYFILE.PUB.MKTG  
ACCOUNT -      READ   : AC      } Applies to all  
                WRITE  : AC      } files in this  
                APPEND  : AC      } account  
                LOCK    : AC      }  
                EXECUTE : AC      }  
  
GROUP -        READ   : ANY     } Applies to all  
                WRITE  : AL,GU   } files in this  
                APPEND  : AL,GU   } group  
                LOCK    : ANY     }  
                EXECUTE : AL,GU   }  
  
FILE -         READ   : ANY     } Applies to  
                WRITE  : ANY     } this file only  
                APPEND  : ANY     } FCODE:1029  
                LOCK    : ANY     } **SECURITY IS ON  
                EXECUTE : ANY     } No ACD  
  
FOR USER,MKTG:READ,EXECUTE } Access for  
                             } this user to  
                             } this file
```

54

November, 1997

Notes:

ACD → EXEC → GWP → locked → file
ACD → file

Access Control Definitions (ACDs)

- ACDs control MPE disk and device file access.
- ACDs override RELEASE/SECURE; file lockwords; and account-, group-, and file-level attributes.
- ACDs are implemented through the ALTSEC command.
- ACDs are displayed by the LISTFILE command for disk files and directories and by the SHOWDEV command for device files.
- ACDs are required for all HFS directory and file access.

539

ALTSEC

November, 1997

Notes:

ALTSEC Command

```
      ,filename;NEWACD =  
ALTSEC object,devclass;ADDPAIR = ACCESS:USER(S);.....  
      ,1dev ;REPAIR =  
      DELPAIR =  
      REFACD =  
COPYACD = object  
DELACD
```

```
:altsec paytab2;copyacd-paytab1  
:listfile paytab@,.acd  
ACCOUNT= FIN GROUP= PUB
```

FILENAME		-----ACD ENTRIES-----
PAYTAB1	MGR.FIN	: R,W,A,L
	@.FIN	: R
PAYTAB2	MGR.FIN	: R,W,A,L
	@.FIN	: R

Notes:

New MPE/iX 5.0 Commands

SETCLOCK Sets system date and time
SHOWCLOCK Displays system date and time

:SHOWCLOCK

SYSTEM TIME: MON, AUG 7, 1995, 6:48:12 PM
CURRENT TIME CORRECTION: 0 SECONDS
TIME ZONE: 7 HOURS 7 MINUTES WESTERN HEMISPHERE

:SETCLOCK TIMEZONE=W8:00

SYSTEM TIME: MON, AUG 7, 1995, 6:48:29 PM
CURRENT TIME CORRECTION: -3599 SECONDS
TIME ZONE: 8 HOURS 0 MINUTES WESTERN HEMISPHERE

Notes:

what are they

Monitoring Job and Session States

:SHOWJOB

JOBNUM	STATE	IPRI	JIN	JLIST	INTRODUCED	JOB NAME
#J34	EXEC		10S	LP	MON 8:30A	MGR.ORDERS
#S23	EXEC		20	20	MON 8:45A	OPERATOR.SYS
#J41	SUSP		10S	LP	MON 8:50A	CLERK.ADMIN
#J45	WAIT:	1 8	10S	LP	MON 9:05A	USER.FINANCE
#J52	WAIT:	D 6	10S	LP	MON 9:20A	MGR.MRKTG

5 JOBS (DISPLAYED)

0 INTRO
 2 WAIT: INCL 1 DEFERRED
 2 EXEC: INCL 1 SESSION
 1 SUSP

JOBFENCE: 7; JLIMIT 2; SLIMIT=10
 CURRENT: 10/11/91 12:44

JOBNUM	STATE	IPRI	JIN	JLIST	SCHEDULED-INTRO	JOB NAME
#J25	EXEC		10S	LP	10/11/91 18:00	BACKUP,OPERATOR.SYS


1 SCHEDULE JOB(S)

6.25

November, 1997

Notes:

9x8LX/RX I/O Structure

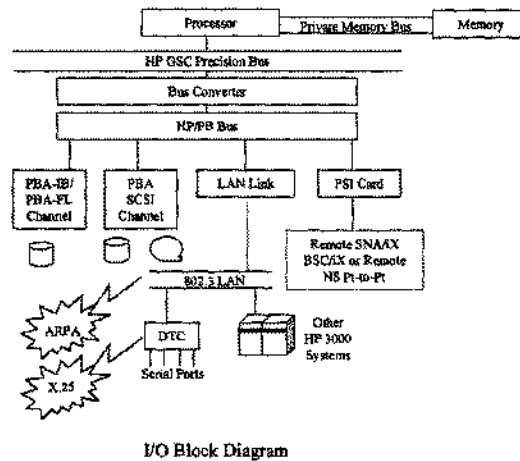

7.17

November, 1997


Notes:

The 9x8LX/RX support the following:

- One processor with on-chip floating point
- Standard amount of memory (32-64 MB)
- One multifunction I/O card
- One integrated 3.5 in 1.0 GB disk mechanism
- One integrated 3.5 inch 2.0 BG digital data storage (DDS) cartridge tape drive
- One HP PowerTrust uninterruptable power supply (UPS) for power protection
- Hardware paths are assigned to I/O devices at configuration time to establish the address of the device relative to the processor. For SCSI devices the path is 56/(card slot x 4).device address.0. For example, the system disk (LDEV1) used the SCSI interface that is part of the MFIO card. The MFIO card is located in card slot 13. the path for LDEV 1 is 56/52.6.0. With SCSI devices, the higher the device address, the higher the priority. The last number in the path will always be 0.
- The hardware path for devices off of a PBA channel is 56/(PBA card slot x 4).0. device address. For example, if the PBA-IB card occupies card slot 12, the PBA path is 48. If the device address is 1, the hardware path for that device would be 56/48.0.1. The second number in the path will always be 0.

*A1747A MFIOs converted
only on A1747A Chris Clark*

Series 9x8LX/RX Package Layout

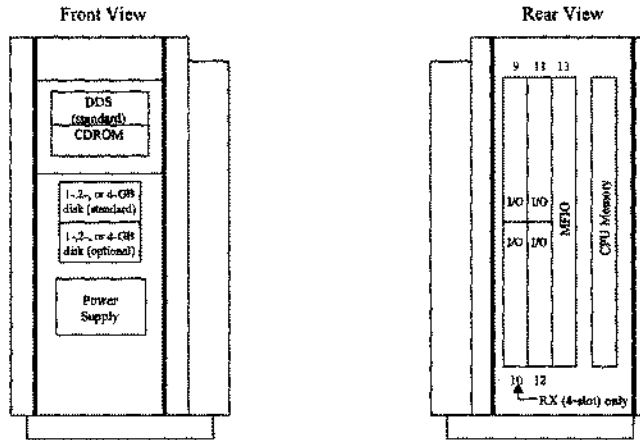

3.14.1

November, 1997

Notes:

SYSGEN Capabilities

- Configures I/O devices
- Configures system parameters
- Changes user and system logging
- Modifies system file information
- Makes a system load tape (SLT)

43

November, 1997

Notes:

SYSGEN - prev. 7/25/97

Obtaining Current Information

At the terminal


```
i/o> ldev  
i/o> lclass  
i/o> lpath
```

Offline

```
i/o> ldev dest=offline  
i/o> lclass dest=offline  
i/o> lpath dest=offline  
i/o> oclose
```

Notes:

SYSGEN TAPE Command

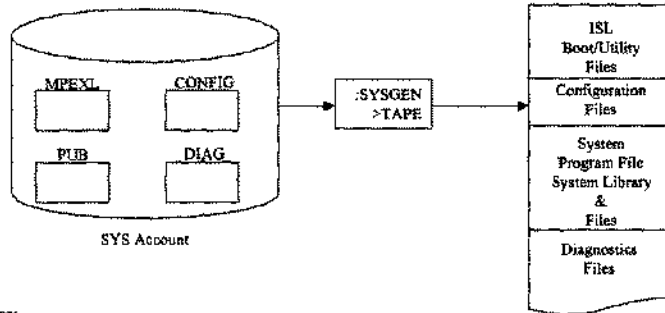


Syntax

```
TAPE(TA) [mode = VERBOSE/NOCHANGE/NOCONFIG/NODIAG/NOLOGNUM]
          [dest = OFFLINE]
          [store= "fileset"]
```

Notes:

Volume Management Overview

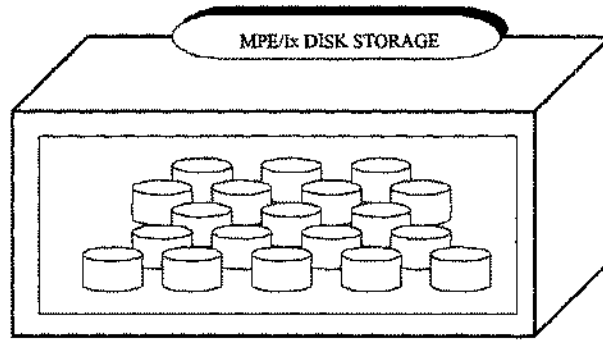


10.2

November, 1997

Notes:

Volume States

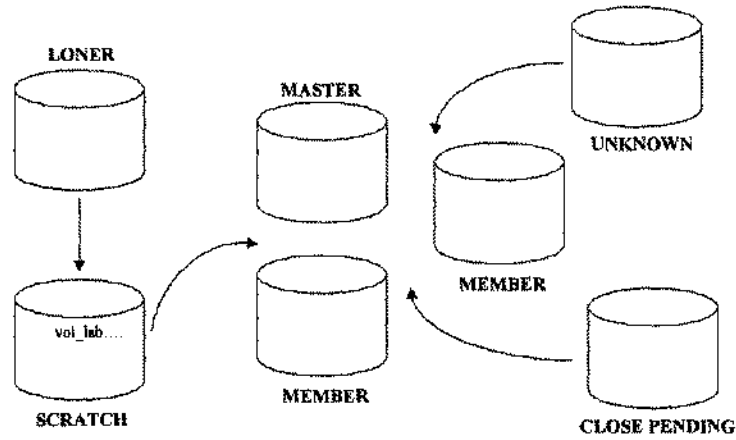

B11

November, 1997

Notes:

Viewing Disk Space Usage

DISCFREE A.50.01 Copyright (C) Hewlett-Packard 1992. All rights reserved.
WED, JUN 5, 1996, 4:00 PM

Syntax is: DISCFREE [<format>] [>1dev>] [,<vsname>]

Where <format> is one of the following:

- A, HISTOGRAM, 1: to see a histogram.
- B, ALLOCATION, 2: to see disc allocation.
- C, ALLOCATION2, 3: to see disc allocation format 2.
- D, SUMMARY, 4: to see disc allocation summary.
- E, SUMMARY2, 5: to see disc allocation summary format 2.

Where <1dev> is the logical device number of a disc.

Enter [<format>] [,<1dev>] [, <vsname>] : C

10.11

November, 1997

Notes:

*need cmd to combine
Diskuse + Report*

TEXT PAGE: DISCFREE Example

DISCFREE C

DISCFREE A.50.01 Copyright (C) Hewlett-Packard 1992. All rights reserved.

WED, JUN 5, 1996, 3:59 PM

ALL MEASUREMENTS ARE IN SECTORS.
ALL PERCENTAGES ARE RELATIVE TO THE DEVICE SIZE

	Configured	In Use	Available
LDEV : 1	--(MPEXL_SYSTEM_VOLUME_SET.SYSTEM1)		
Device	5294144	2697040 (51%)	2597104 (49%)
Permanent	3976608 (75%)	2589200 (49%)	1371408 (26%)
Transient	3976608 (75%)	107840 (2%)	2597104 (49%)
LDEV : 2	--(MPEXL_SYSTEM_VOLUME_SET.SYSTEM1)		
Device	4109712	2997648 (73%)	1112064 (27%)
Permanent	3082288 (75%)	2997648 (73%)	84640 (2%)
Transient	3082288 (75%)	0 (0%)	1112064 (27%)
LDEV : 3	--(MPEXL_SYSTEM_VOLUME_SET.SYSTEM1)		
Device	4109712	2633312 (64%)	1476400 (36%)
Permanent	3287770 (80%)	2467152 (60%)	821942 (20%)
Transient	3287770 (80%)	166160 (4%)	1476400 (36%)
TOTALS			
Device	13513568	8328000 (62%)	5185568 (38%)
Permanent	10405447 (77%)	8054000 (60%)	2297307 (17%)
Transient	10405447 (77%)	274000 (2%)	5185568 (38%)

1016

November, 1997

Notes:


The amount and percentage available in the last column will always be less than or equal to the total amount of free space for the device. As a consequence, the percentages and sector amounts, if totaled right-to-left, may not equal the amounts and percentages in the "Configured" column.

Contiguous Space

:VOLUTIL

volutil: CONTIGVOL LDEV=2 SIZE=500000 ;UNRESTRICTED;TRANSIENTOK

Where will it fit?

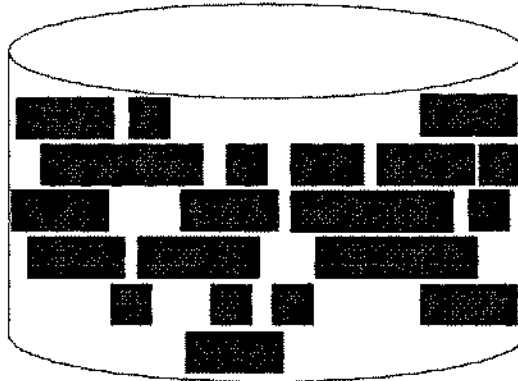

Notes:

Contiguous Space - CONTIGVOL

volutil: CONTIGVOL 2

*WARNING: *** Running CONTIGVOL on a busy system may cause *** WARNING*

*WARNING: *** "OUT OF DISK SPACE" errors temporarily on *** WARNING*

*WARNING: specified LDEV/Volume *** WARNING*

*Verify: 578480 contiguous sectors available on ldev 2. Continue [Y/N] ? Y

Processing Labels on Ldev 3

Processing Labels on Ldev 3

Processing Labels on Ldev 3

Percent Complete 10

Percent Complete 20

Percent Complete 30

Percent Complete 50

Percent Complete 60

Percent Complete 70

Percent Complete 80

Percent Complete 90

Number of Extents Moved 384

Maximum contiguous Sectors Free 578480

Notes:

System Backups

SYSGEN TAPE

Operating System
Load Utilities
Configuration
Diagnostics

STORE TAPE

User Files
All system files
Product files
Directory

Use →

Notes:

System Backup and Data Recovery

If users need to continue to access files during backup time, online backups will need to be performed with an online backup utility such as HP TurboSTORE/iX. This product can either reduce or eliminate user downtime during system backups.

As of MPE/iX 5.5, HP TurboSTORE/iX II now allows operations to specify file synchronization at the beginning or end of the backup (a small window when users must be "quiet" on the system). If HP TurboSTORE/iX 7x24 is used, users can remain active on the system during the entire backup.

Notes:

Tape Verification


To verify your backup media

```
FILE T;DEV=TAPE  
VSTORE *T;@.@.@;ONERR=QUIT;SHOW;LOCAL;DIRECTORY
```

To verify you SLT

```
CHECKSLT.MPEXL.TELESUP
```

Notes:

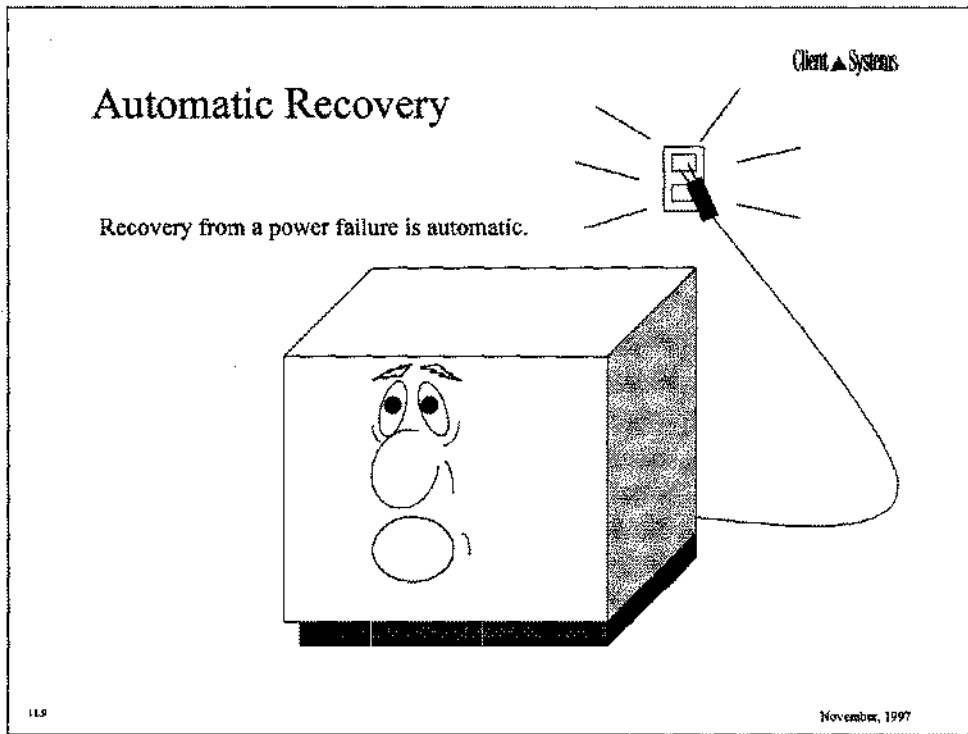

Notes:

MPE/iX System Startup Media Types

Files	START RECOVERY	START NORECOVERY	UPDATE NOCONFIG	UPDATE CONFIG	INSTALL
Bootfile And OS	CD-ROM	CD-ROM	SLT	SLT	SLT
Configuration	CD-ROM	CD-ROM	CD-ROM	SLT	SLT
Directory	CD-ROM	CD-ROM	CD-ROM	CD-ROM	STORE
User Files	CD-ROM	CD-ROM	CD-ROM	CD-ROM	STORE
Input/Output Files	CD-ROM	No	No	No	No
Output/Spool Files	CD-ROM	CD-ROM	CD-ROM	CD-ROM	STORE

Notes:

Selecting a Boot Path -- 9x8, 9x9KS

PDC - Processor Dependent Code - Version 1.3

© Copyright 1990-1993, Hewlett-Packard Company, All rights reserved

64 MB of memory configured and tested.

Primary boot path: 56/52.6 (dec)

Alternate boot path: 56/52.0 (dec)

Main Menu

Command	Description
B <code>Oot</code> [<code>PR</code>] <code> ALT</code> <code><path></code>]	Boot from specified path
P <code>Ath</code> [<code>PR</code>] <code> ALT</code> [<code><path></code>]	Display or modify a path
S <code>EAtch</code> [<code>D</code>] <code>isplay</code> <code> PL</code> [<code><path></code>]	Search for boot devices
C <code>Onfiguration</code> <code>ment</code>	Displays or sets boot values
I <code>N</code> formation <code>menu</code>	Displays hardware information
S <code>E</code> vice <code>menu</code>	Displays service commands
D <code>isplay</code>	Redisplay the current menu
H <code>E</code> lp [<code><menu></code> <code><command></code>]	Display help for menu or command
R <code>E</code> SET	Restart the system

Main Menu: Enter command or menu > BO PRI

Notes:

DUMP Example

Ctrl + B
CM>TC

Boot from primary boot path (Y or N) ? > Y

Interact with IPL (Y/N) Y

ISL> DUMP

Enter user Identification string for this dump

ISL> START

:HELLO OPERATOR>SYS;HIPRI

Notes:

Access Port (AP)

Purpose: Provides capability for versatile remote support.
Security: Requires both hardware and software enabling.
Function: The following may be done remotely:

- observe local console
- act as full console
- boot and patch system
- reset the system (hard or soft)

Notes:

Access Port -- Enabling

Ctrl + B

CM>UR

Remote is now unlocked.

CM>ER

Current remote console access configuration.

Mode: multiple (or single)

Password: password

Password faults: 01


Remote CS: disabled (or enabled)

Do you wish to change the configuration (Y/N): N

Remote console access is now enabled.

Notes:

Spool File States

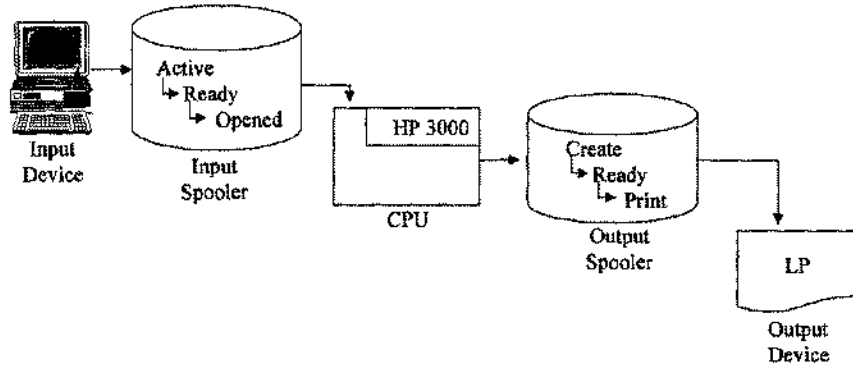

A4

November, 1997

Notes:

Native Mode Spooler Commands and Utilities

Client Systems

Spooler commands

SPOOLER
SPOOLF
LISTSPF

Spooler utilities

SPFXFER
PRINTSPF
SPIFF

November, 1997

Notes:

The Spool File Interface (SPIFF) Utility

- SPIFF is a replacement for the SPOOK program.
- Several existing features of SPOOK have been enhanced.
- New features have been added.
- Defaults approximate SPOOK behavior.

A2

November, 1997

*DO exercises watercraft
TO PC!*

Client system

Notes:

Creating a Nonsystem Volume Set

→ No. with new system
volutil: newset sname=production master=prodmaster LDEV=21

* Verify: Initialize set PRODUCTION:PRODMASTER on LDEV21 [Y/N]? Y

beginning recovery

completed recovery of free space map and label table

completed recovery of files

begin posting of recovered files recovery completed

* Note: New master volume has been initialized on LDEV 21

Notes:

Spooler and Queue States

DEV	SPSTATE	QSTATE	OWNERSHIP	MPE COMMAND
6	ACTIVE or IDLE	OPENED	OUT SPOOLER	SPOOLER 6 START
6		CLOSED	NO SPOOLER	SPOOLER 6 STOP
6	ACTIVE or IDLE	CLOSED	OUT SPOOLER	SPOOLER 6 START SHUTE
6		OPENED	NO SPOOLER	SPOOLER 6 STOP OPENO

B.11

November, 1997

Notes:

SAMPLE TEST QUESTIONS

1. What command (s) can be used to obtain contiguous space?
 - a) SYSGEN: AVOL
 - b) VOLUTIL: CONTIGVOL
 - c) DSTAT ALL
 - d) VOLSTAT: MORESPACE

2. From the root directory, what can be created? (select 3 answers)
 - a) Directories
 - b) Accounts
 - c) Files
 - d) Groups

3. What is the path name from the CURRENT DIRECTORY to a target file called?
Relative path name

4. What is the path name from the ROOT DIRECTORY to a target file called?
absolute path name

5. When using the command NEWUSER with no options, what is created?
 - a) user with default group PUB.
 - b) error message.
 - c) user created, then prompted for a password.
 - d) user on currently logged on account. No home group is created.

6. Which command gives information on available free disk space? Pick the best answer.
 - a) DISKSIZE
 - b) FREE5
 - c) DISCFREE
 - d) VOLSPACE

7. What command causes "QUIET" mode to be turned on?
 - a) LISTDIR
 - b) SETMSG OFF
 - c) TELLOP
 - d) SHOWJOB

8. Which native mode command syntax will stop the spooler but leave the queue open for more spoolfiles for LDEV 6? Pick the best answer.
- a) SPOOLER 6;START
 - b) STOPSPPOOL 6; OPENQ
 - c) SPOOLER 6;STOP;OPENQ
 - d) SPOOLER 6;START;SHUTQ
9. Which description best explains the functions of the MFIO card on a HP3000?
- a) Has a console port, 10Base-T(RJ-45) connection and parallel port.
 - b) Has connections for SCSI, LAN, CONSOLE and ACCESS port .
 - c) Has connections for MUX, 100Base-T LAN and UPS connection.
10. Where does CONFIG come from when a START NORECOVERY is performed?
- a) PUB.SYS
 - b) CONFIG.TELESUP
 - c) CONFIG.SYS
 - d) PUB.SUPPORT
11. What is on an SLT? Pick the best answer.
- a) SYSDUMP and @.@.@
 - b) ISL and @.PUB.SYS
 - c) ISL and Boot/Utility, Configuration, System, library and diagnostic files.
 - d) NMCONFIG.PUB.SYS
12. What is NOT on an SLT (by default). Pick the best answer.
- a) @.PUB.SYS
 - b) All user files(@.@.@).
 - c) @.PUB.TELESUP
 - d) @.CONFIG.SYS
13. What is a purchaseable product that allows a system to recover IMAGE/SQL, KSAM and other files during a power loss?
- a) SharePlex/iX
 - b) TurboSTORE 7/24 True Online Backup
 - c) HP PowerTrust
 - d) AutoRestart/iX
14. If you lose a SYSTEM DISK, what is your option for recovery?
- a) COLDSTART
 - b) START RECOVERY
 - c) INSTALL
 - d) UPDATE NOCONFIG

15. How do you list currently mounted disks and their status?
a) DSTAT ALL
b) DISKMOUNT ALL
c) DISKUSE
d) SHOWDISC ALL
16. What is the function(s) of the ACCESS PORT?
a) Observe the local console.
b) Act as full console.
c) Boot, patch or reset the system (hard and soft)
d) All of the above.
17. What is the format for DAT tape drives?
DOS
18. How do you create/utilize a new system volume? Pick the best answer.
a) VOLUTIL: NEWVOL
b) SYSGEN; AVOL
c) VINIT: CONDENSE
19. What group do the OUTPUT spoolfiles live in?
OUT.HPSPool
20. What group do the INPUT spoolfiles live in?
IN.HPSPool
21. What command lists current UDC's?
a) UDC
b) SHOWUDC
c) SHOWCATALOG
d) PRINTUDC
22. What system startup can be done to recover spoolfiles? Pick the best answer.
a) START RECOVERY
b) START NORECOVERY
c) UPDATE CONFIG
d) UPDATE NOCONFIG
e) All the above.
23. How can you set the size of the REDO command stack?
a) SYSGEN: Under "misc"
b) START NORECOVERY
c) ALTSIZE REDO
d) SETVAR HPREDOSIZE

24. Which of the following are SYSDIAG programs?
- a) LOGTOOL for logfile maintenance.
 - b) SYSMAP to list current hardware configuration information.
 - c) TERMDISM to run diagnostics, reset or dump a port.
 - d) All of the above.
25. Where does SYSDIAG reside in?
- a) PRVXL.TELESUP
 - b) PUB.SUPPORT
 - c) PUB.SYS
 - d) 3000devs
26. After a =SHUTDOWN, what CM> command must you use to reset memory?
- a) TC
 - b) CO
 - c) ER
 - d) RS
27. In HFS, what is the complete pathname from the root referred to as?
- a) fully qualified pathname
 - b) absolute pathname
 - c) relative pathname
28. There are two kinds of volumes on the system. There are SYSTEM and ~~PRIVATE~~ NON-SYSTEM volumes.
29. How do you list current file equations?
- a) LISTF
 - b) SELEQ=
 - c) LISTEQ
30. How do you suspend a currently running job?
- a) ABORTJOB
 - b) ALTJOB
 - c) BREAKJOB
 - d) RESUMEJOB
31. If the power fails on a 9x7 system, what is maintained by the internal batteries?
- a) cpu
 - b) memory
 - c) network
 - d) all of the above

32. Which of the following are Directory Access Modes implemented with ACDs?
(Hint: Don't confuse these with File Access Modes)
- a) RD *Read*
 - b) TD *Transfer*
 - c) CD *Change*
 - d) DD *Delete*
 - e) all of the above
33. What command gives access to a specific operator command?
- a) SHOWME
 - b) CONSOLE
 - c) ABORT
 - d) ALLOW
34. What does the CONSOLE command do? Pick the best answer.
- a) Allows a user terminal to act as system console.
 - b) Allows a user terminal to have CTRL A and B functionality.
 - c) Allows a user terminal to act as system console with CTRL A and B functionality.
 - d) Allows a user terminal to act as system console without CTRL A and B functionality.
35. Which command would append the output of the SHOWTIME command to a file LOGFILE?
- a) SHOWTIME>>LOGFILE
 - b) SHOWTIME+>LOGFILE
 - c) SHOWTIME -A LOGFILE
 - d) LOGFILE <+SHOWTIME
36. Capabilities assigned to a user can be displayed using the Listuser command.
37. Which commands could you issue to find out who is the creator of FILE1 is and its lockword?
- a) LISTF FILE1,-3
 - b) LISTFILE FILE1,-3
 - c) LISTFILE FILE1,2
 - d) LISTFILE FILE1,4
38. The card that is supplied the HP3000 9x7 systems that houses the LAN, two RS232 ports, SCSI interface, integrated ThinMAU and AUI conector is called the
- a) personality card
 - b) medium attachment card
 - c) multifunction I/O card *MANUAL*
 - d) standard connectivity card

39. Jobs can be in which of the following states?

- a) EXEC
- b) SUSP
- c) WAIT
- d) INTRO
- e) SCHED
- f) ~~PRIVATE~~

40. Which of the following items can be altered with the ALTJOB command?

- a) a job's input priority
- b) a job's processing queue
- c) a session's processing queue
- d) the destination of a job's \$STDLIST

41. Which command issued from SYSGEN's io> prompt will produce a hard copy listing of the current I/O configuration?

- a) ldev *prt
- b) list print
- c) list offline
- d) ldev dest=offline

42. To activate the DTC configuration changes, you must reboot the system with a START NORECOVERY and _____.

- a) reset the DTC
- b) boot the system from tape
- c) run the INVOKE utility from NMMGR
- d) run NMMGRVER against NMCONFIG.PUB.SYS

Look at the following SHOWJOB

JOBNUM	STATE	IPRI	JIN	JLIST	INTRODUCED	JOBNAME
#J34	EXEC		10S	LP	MON 8:30A	MGR.ORDERS
#S23	EXEC		20	20	MON 8:45A	OPERATOR.SYS
#J40	SUSP		10S	LP	MON 8:49A	MGR.MKTG
#J41	WAIT	1 8	10S	LP	MON 8:50A	CLERK.ADMN
#J45	WAIT	D 6	10S	LP	MON 9:05A	USER.FINANCE

5 JOBS (DISPLAYED):

0 INTRO
 2 WAIT: INCL 1 DEFERRED
 2 EXEC: INCL 1 SESSION
 1 SUSP

JOBFENCE: 7; JLIMIT: 2; SLIMIT= 10

CURRENT: 10/11/97 12:44

JOBNUM	STATE	IPRI	JIN	JLIST	SCHEDULED-INTRO	JOB NAME
#J25	SCHED	8	10S	LP	10/11/97 18:00	OPERATOR.SYS

43. Why is #J41 not running? Pick the best answer.

- a) JLIMIT 2
- b) SLIMIT: 10
- c) JOBFENCE: 7
- d) None of the above

44. Why is #J45 not going to run? Pick the best answer.

- a) JLIMIT: 2
- b) SLIMIT: 10
- c) JOBFENCE: 7
- d) None of the above

45. There are three places MPE/iX documentation is referenced: Paper manuals, Online and

HP LaserROM

46. How to you verify the data on an NM STORE tape?

- a) VALIDATE
- b) VSTORE
- c) STORE/RESTORE
- d) SYSGEN

47. What file equation is used to backreference a tape drive on LDEV 7?
- a) FILE 7 DEV=7
 - b) FILE T;DEV=7
 - c) FILE *=LDEV 7
48. Assuming a PBA-IB card is installed in slot 12 of a 9x7, what would be the address to that card?
- a) 48.0.1
 - b) 52.6.0
 - c) 52.5.0
 - d) 52.0.0
49. What name is used for the boot disk including the CIO channel?
- a) alternate boot path
 - b) primary boot path
 - c) device path
 - d) 2/4.1.0
50. What NM command lists spoolfiles? Pick the best answer.
- a) SHOWOUT
 - b) DSTAT
 - c) SPOOLER
 - d) LISTSPF
51. What ~~subsystem~~ allows the altering of spoolfile attributes?
- a) SPOOLER
 - b) SPIFF
 - c) SPOOLF
 - d) SPOOL
52. Where can you change PERMANENT and TRANSIENT disk space requirements?
- a) SYSGEN
 - b) START NORECOVERY
 - c) VOLUTIL: ALTERVOL
 - d) DISCFREE
53. What happens when a user logs on who has no home group?
- a) User gets "Account/user exists. No home group for user"
 - b) User logs on into PUB by default
 - c) User is allowed to logon, but has no access to any group
 - d) User is allowed to logon, but immediately aborted

54. What command do is used to flag spoolfiles to save after printing?

- a) SPOOK5
- b) SPOOLER LP;START
- c) SAVESPOOL
- d) SPOOLF #Onnn;SPSAVE

55. Which of the following are valid HFS commands from MPE?

- a) CHDIR
- b) NEWDIR
- c) PURGEDIR
- d) all of the above

56. In using the HELP facility, you may enter a COMMAND name and the keyword:

- a) PARMS
- b) OPERATION
- c) EXAMPLE *ALL*
- d) all of the above

57. You have recieved a new FOS of MPE/iX and you want to update your system. You will need to

- a) INSTALL
- b) UPDATE NOCONFIG
- c) UPDATE CONFIG
- d) RELOAD

58. Which example will "filter" when selecting spoolfiles with the command LISTSPF?

- a) LISTSPF #Onnn;FILTER
- b) LISTSPF #Onnn;SELEQ=[(OWNER=MANAGER.SYS)AND (PAGES,100)]
- c) LISTSPF>>FILTER
- d) FILTER>>LISTSPF

59. Which of the following are valid options for the SETCATALOG command?

- a) ;SHOW
- b) ;RESET
- c) ;APPEND
- d) ;DELETE
- e) All of the above

60. How do you turn off a UDC file named UDCFILE in your group?

- a) UDCFILE DISABLE
- b) UNDO PATH UDCFILE
- c) SETCATALOG
- d) SETCATALOG UDCFILE;OFF

61. How do you list what UDC's you have access to?
- a) SHOWUDC
 - b) SHOWCATALOG
 - c) UDCFILE;SHOW
 - d) SHOWENABLE
62. What are the two NM commands to control the system clock?
- a) SETTIME/SHOWTIME
 - b) CLOCKUTIL/TIMESTAMP
 - c) CLKPROG/SHOWTIME
 - d) SETCLOCK/SHOWCLOCK
63. Which example best represents the prompt used in a JOB file?
- a) #JOB NEWJOB,MANAGER.SYS
 - b) !JOB NEWJOB,MANAGER.SYS
 - c) ?JOB NEWJOB,MANAGER.SYS
 - d) \$JOB NEWJOB,MANAGER.SYS
64. What is used to separate each UDC command in a UDC file?
- a) -----
 - b) *****
 - c) :eod
65. How do you create a SLT?
- a) STORE @.@.@;DIRECTORY;*T;SHOW
 - b) SYSDUMP *T
 - c) sysgen> TA
66. How do you do a PARTIAL backup? Pick the best answer.
- a) PARTBACKUP
 - b) STORE @.@.@;*T;DATE>=dd/mm/yy
(where dd/mm/yy is the date of the last FULL BACKUP)
 - c) sysgen> TA STORE=@.@.@
67. You are adding a new volume to your system, what makes the most sense?
- a) Use AVOL in SYSGEN, nothing else
 - b) Use VOLUTIL to SCRATCHVOL, nothing else
 - c) Use AVOL in SYSGEN if not already configured, then use VOLUTIL:
NEWVOL for the rest
 - d) Use VINIT
68. Can a volume be configured in VOLUTIL without being physically attached to the system?
- a) Yes, using NEWVOL first, then using INITVOL when the drive is attached
 - b) No, VOLUTIL requires the volume to be physically attached at time of configuration

69. Which of the following steps are the correct way of initiating a MEMORY DUMP?
- a) CTRL-B, then RS, reboot the system to the ISL>, then type DUMP
 - b) CTRL-B, then TC, reboot the system to the ISL>, then type DUMP
 - c) CTRL-B, then TC, reboot the system, then START NOECOVERY, then type DUMP
 - d) Take a STRING DUMP from the CONSOLE, save it to floppy disk.
70. What is the difference between a SM and a AM ?
- a) SM has the capability to create, alter, purge and list any users or groups in any account
 - b) AM has the capability to create, alter, purge and list users or groups in the AM's account only
 - c) Both a and b are correct
 - d) Neither a or b are correct
71. Which of the following PRINT commands will work?
- a) FILE xxx;DEV=LP
PRINT MYFILE, *xxx
(this will send MYFILE's listing to the LP)
 - b) PRINT MYFILE
(this will print MYFILE's listing on the \$STDLIST)
 - c) PRINT MYFILE>TEMPFILE
(this will send MYFILE's listing to a temporary file named TEMPFILE)
 - d) PRINT MYFILE>>TEMPFILE
(this will APPEND MYFILE's output to a temporary file named TEMPFILE)
 - e) None of the above will work
 - d) All of the above will work.
72. What does ^{Reply}RECALL do?
- a) Allows the operator to REPLY to outstanding system requests
 - b) Allows the operator to ABORT users
 - c) Allows the operator to TELL users messages
73. How do you make SYSGEN use a particular basegroup for reference?
- a) io
 - b) ba
 - c) ta
 - d) mi
74. The use of NMMGR requires the user to have NA and NW capability.

75. RESTORE *T;@.@.@;LISTDIR would do the following:
- a) Restore @.@.@ and produce a list
 - b) Restore @.@.@, except files named LISTDIR
 - c) Would not restore any files, but would list the tape directory
76. When does the group BOOTUP.SYS get used?
- a) When a START NORECOVERY is done *config??*
 - b) When a START RECOVERY is done
 - c) When a UPDATE is done
 - d) When a INSTALL is done *Type*
77. If you had a UDC enabled called SHOWME, would the system:
- a) execute your UDC SHOWME
 - b) execute the CI command SHOWME
78. What is the search path for commands?
- a) CI, then UDC, then attempt to run FNAME
 - b) UDC, then CI, then attempt to run FNAME
 - c) attempt to run FNAME, then CI, then UDC
79. What command is used to display disk space usage for one or more directories in a directory tree?
- a) FREE5
 - b) REPORT *MS*
 - c) DISKUSE *MS*

*Frank Smith
SM class back east*